

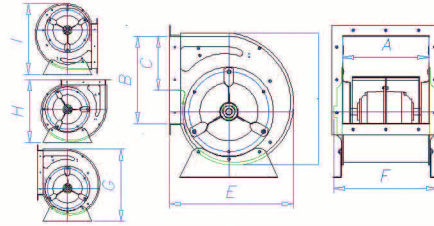



# BLOWER WITH External -RotorMotors / Single Phase



SPECIFICATIONS										DIMENSIONS (mm)									
MODEL	TYPE	FAN DIA. (m m)	VOLT (v)	Hz	Amps (A)	Power (P)	R.P.M.	M <sup>3</sup> /h	Kg	A	B	C	D	E	F	G	H	I	
1	BEF-20/20E4S	Double Inlet	20X20	220	50	2.5	330	1370	2100	10.6	240	242	150	363	342	304	397	348	392
2	BEF-20/20E6S	Double Inlet	20X20	220	50	2.0	140	940	1550	10.6	240	242	150	363	342	304	397	348	392
3	BEF-25/25F6S	Double Inlet	25X25	220	50	2.2	400	900	3100	16	313	310	190	474	427	374	490	430	493
4	BEF-25/25F4S	Double Inlet	25X25	220	50	4.5	890	1200	6100	16.3	313	310	190	474	427	374	490	430	493
5	BEF-30/30M6S	Double Inlet	30X30	220	50	3.4	600	600	5200	27.1	380	377	242	557	495	456	574	512	574

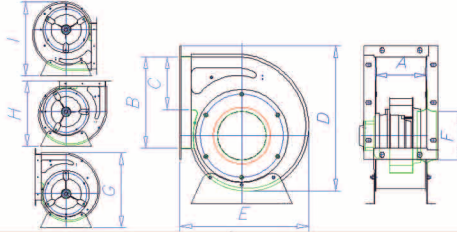

SPECIFICATIONS										DIMENSIONS (mm)									
MODEL	TYPE	FAN DIA. (m m)	VOLT (v)	Hz	Amps (A)	Power (P)	R.P.M.	M <sup>3</sup> /h	Kg	A	B	C	D	E	F	G	H	I	
1	BEB-20/6L2S	Single Inlet	20X6	220	50	0.8	170	2750	800	9.1	137	242	150	386	342	130	397	348	392
2	BEB-20/10L4S	Single Inlet	20X10	220	50	0.38	58	1400	600	9.9	137	242	150	386	342	130	397	348	392
3	BEB-25/6L2S	Single Inlet	25X6	220	50	1.1	240	2600	1200	11.8	145	309	190	497	427	150	490	430	493
4	BEB-25/10L4S	Single Inlet	25X10	220	50	0.45	80	1400	850	12.6	185	309	190	497	427	150	490	430	493
5	BEB-30/10L4S	Single Inlet	30X10	220	50	0.55	120	1400	1300	14.8	189	376	242	574	495	190	574	512	574

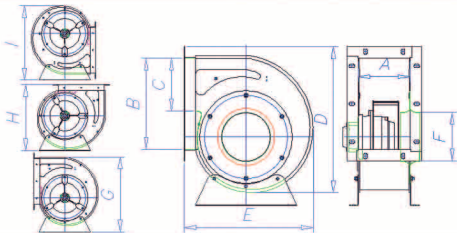

SPECIFICATIONS										DIMENSIONS (mm)									
MODEL	TYPE	FAN DIA. (m m)	VOLT (v)	Hz	Amps (A)	Power (P)	R.P.M.	M <sup>3</sup> /h	Kg	A	B	C	D	E	F	G	H	I	
1	BEF-20/10L4S	Single Inlet	20X10	220	50	0.8	160	1210	1300	9.1	137	242	150	386	342	160	397	348	392
2	BEF-25/10T4S	Single Inlet	25X10	220	50	2	380	1250	2200	12.7	185	309	190	497	427	180	490	430	493
3	BEF-25/10T6S	Single Inlet	25X10	220	50	1	180	890	1400	12.6	185	309	190	497	427	180	490	430	493
4	BEF-30/10Z4S	Single Inlet	30X10	220	50	4	800	1350	3200	22	189	376	242	574	495	220	574	512	574
5	BEF-30/10Z6S	Single Inlet	30X10	220	50	1.5	300	940	2300	21.8	189	376	242	574	495	220	574	512	574

